



H12-891^{Q&As}

HCIE-Datacom V1.0

Pass Huawei H12-891 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/h12-891.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


The following statement about ISIS (IPv6) is correct?

- A. In order to support the processing and calculation of IPV6 routes, IS-IS has added TLV232, 236
- B. By default, IS-IS has the multi-topology feature turned on
- C. IS-IS works at the data link layer and only needs to add a new TLV to support IPv6
- D. To support the processing and computation of IPv6 routes, IS-IS has added NLPID to the 129TLV

Correct Answer: ACD

QUESTION 2

In the laboratory network, the network is built according to the following topology diagram, SW1 is the default configuration, and SW2 disables the switch STP function.

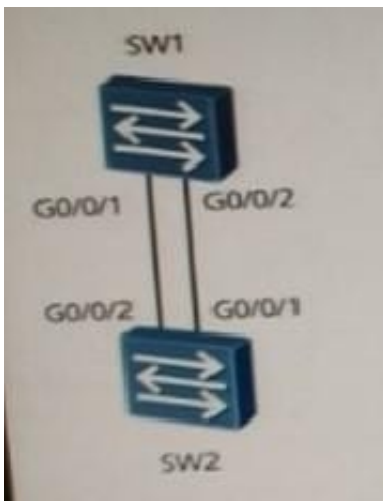

- A. SW1 G0/0/2 enters the Discarding state
- B. SW2 and G0/0/1 enters the Discarding state
- C. SW2 G0/0/2 enters discarding state
- D. No interface is backed up for blocking
- E. SW1's G0/0/1 enters the Discarding state

Correct Answer: D

QUESTION 3

After configuring the VLAN-based MAC address drift detection function, if the MAC address drifts, you can configure the



actions of the interface according to your needs. Which of the following is not a configurable action?

- A. Send an alert
- B. The MAC address blocks
- C. Interface blocking
- D. Traffic filtering

Correct Answer: D

QUESTION 4

There is a new HW office that needs to use their router as a DHCP server. When configuring the DHCP server to provide DHCP services to the current office, what of the following items need to be configured?

- A. Exclude unused IP addresses from the DHCP server
- B. Configure the timeout period for ping packets
- C. Configure the startup file for the DHCP server
- D. Configure manual binding
- E. Configure dhcp address pool

Correct Answer: AE

QUESTION 5

In MPLSVPN, in order to distinguish between IPv4 prefixes that use the same address space, the RD value is added to the IPv4 address, and the following options are described correctly as ?

- A. RD can be used to control the publication of VPN routing information
- B. On a PE device, each VPN instance corresponds to an RD value, and the RD value must be unique on the same PE device
- C. RD is encapsulated in the Update message as an extended community attribute of BGP during delivery
- D. After the PE receives an IPv4 route from CE, it adds an RD to the route to IPv4 that translates to a globally unique VPN-IPv4 route and publishes it on the public network

Correct Answer: B

[Latest H12-891 Dumps](#)

[H12-891 Exam Questions](#)

[H12-891 Braindumps](#)